

MAIN FEATURES

- ❖ 25 W output RF power
- ❖ Stable output power over temperature
- ❖ Low noise figure
- ❖ Ethernet M&C interface
- ❖ Robust construction



DESCRIPTION

This solid state power amplifier is intended for use in S band satellite communications systems as uplink SSPA. It is to be installed directly to the antenna. The outdoor construction protects the amplifier against harsh environmental conditions. The SSPA can be fully remotely monitored and control via the built-in Ethernet interface.

SPECIFICATIONS

Operation Frequency Band	2025 - 2120 MHz
RF Output Power	44 dBm @ P _{3dB} min.
Gain	65 dB min.
Gain Slope	± 0.1 dB / 10 MHz max.
Gain Flatness	± 0.5 dB
Gain Stability / 24 hours @ constant temperature	± 0.25 dB
Output Power Stability vs. temp (ALC ON)	± 1 dB (-40°C to +60°C) max.
AM/PM Conversion @ P _{3dB}	2.5°/dB
ALC Control Range	20 dB min.
In / Out Impedances Nominally	50 Ω
Input VSWR	< 1.3:1
Output VSWR	< 1.4:1
Output Noise in Band 2025-2120 MHz	< -105 dBm/Hz
Output Noise in Band 2200-2300 MHz	< -130 dBm/Hz with filter
Group Delay Variation (with filter)	Linear: 0.02ns/MHz Parabolic: 0.001ns/MHz ² Ripple: 1ns pk-pk
Gain Adjustment Range	min. 20 dB
Gain Adjustment Step	0.1dB typ.
RMS Power Monitoring Accuracy	± 0.5 dB
Harmonics @P _{3dB} -3dB	< -60 dBc
Spurious @P _{3dB} -3dB	< -80 dBc



BPBS71 25W S-band Power Amplifier

Output Sample	-50 dBc typ.
Noise figure	< 3 dB
Intermodulation distortion @ $P_{out}=41dBm$ (two tone, 38dBm/tone, 5MHz spacing)	< -28 dBc typ.
MTBF	> 130 000 Hours
Remote M&C interface	Ethernet
External Mute Function	Optional
Operation Temperature Range	-40°C ... +60°C
Relative Humidity	100%
IP Protection Class	IP65
Shock & Vibration	Transportation
Weight	11 kg
Connectors	AC: Hirose HMS3102A18-10-D-T1 ETHERNET: Amphenol MS3112E12-10S RF IN: N Female SAMPLE: N Female RF OUT: N Female
Dimensions (L x W x H)	360 x 380 x 111 mm (with holders) 360 x 304 x 90 mm (without holders)
Power Supply	110-240 V AC, 47-63 Hz
AC Power Consumption (230V AC) @ $P_{out}=44dBm$	< 120 VA

Specifications are subject to change without notice.



BPBS71 25W S-band Power Amplifier

CONTROL SOFTWARE SCREENSHOT

Factory Settings | **User Settings** | **Remote Control** | **Connection Mode** | IP: 192.168.16.114 | System Status: **Connected**

Recall | Recall | Restart Device | TCP/IP | Port: 23 | Connect | Connections: 1

Boot Mode | Save | Settings | Serial

Summary | Details

Device Type: BPBS71
Serial Number: 001
Date of Manufacture: 10.11.2021
Firmware Version: 1.0
Hardware Version: 1.0

ALC ON-OFF: ON OFF

ALC Level: 44.0 dBm

Attenuation: 00.0 dB

AMPLIFIER OPERATING
RF Out: ON

Output Power: 44.2 dBm

Temperature: 33.57 °C


Output Return Loss = -17.00 dB

Monitor	Current	History
Temperature	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9V Supply Voltage	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
28V Supply Voltage	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Output Return Loss	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9V Current	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Driver FET Current	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
End FET(s) Current	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Fan curr.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Clear Alarm History | CLEAR

RF by User: ON OFF

OUTLINE DIMENSIONS (mm)

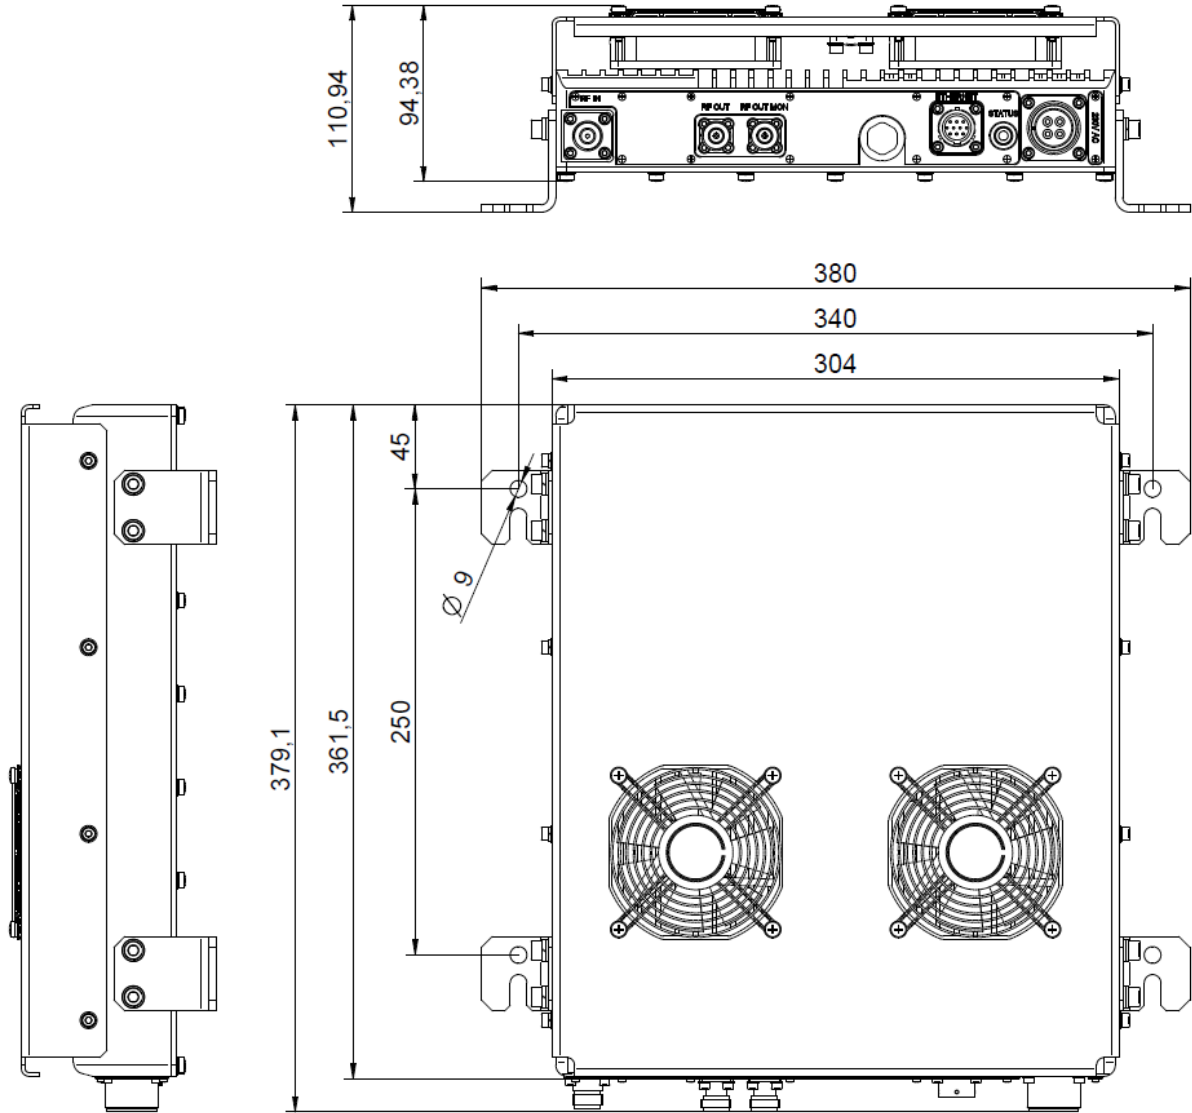

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
BPBS71K11122	BPBS71 25 W, S band, 2025–2120 MHz, power amplifier module, Mute function

DOCUMENT REVISION

DOCUMENT NAME	REVISION	DATE
BPBS71-LM-K11122	V01	11/01/2022